

SEG BACKLIT “ARCHWAY”

ASSEMBLY INSTRUCTION




Indoor Display
Solution



User
Friendly




Cutting-Edge
Design

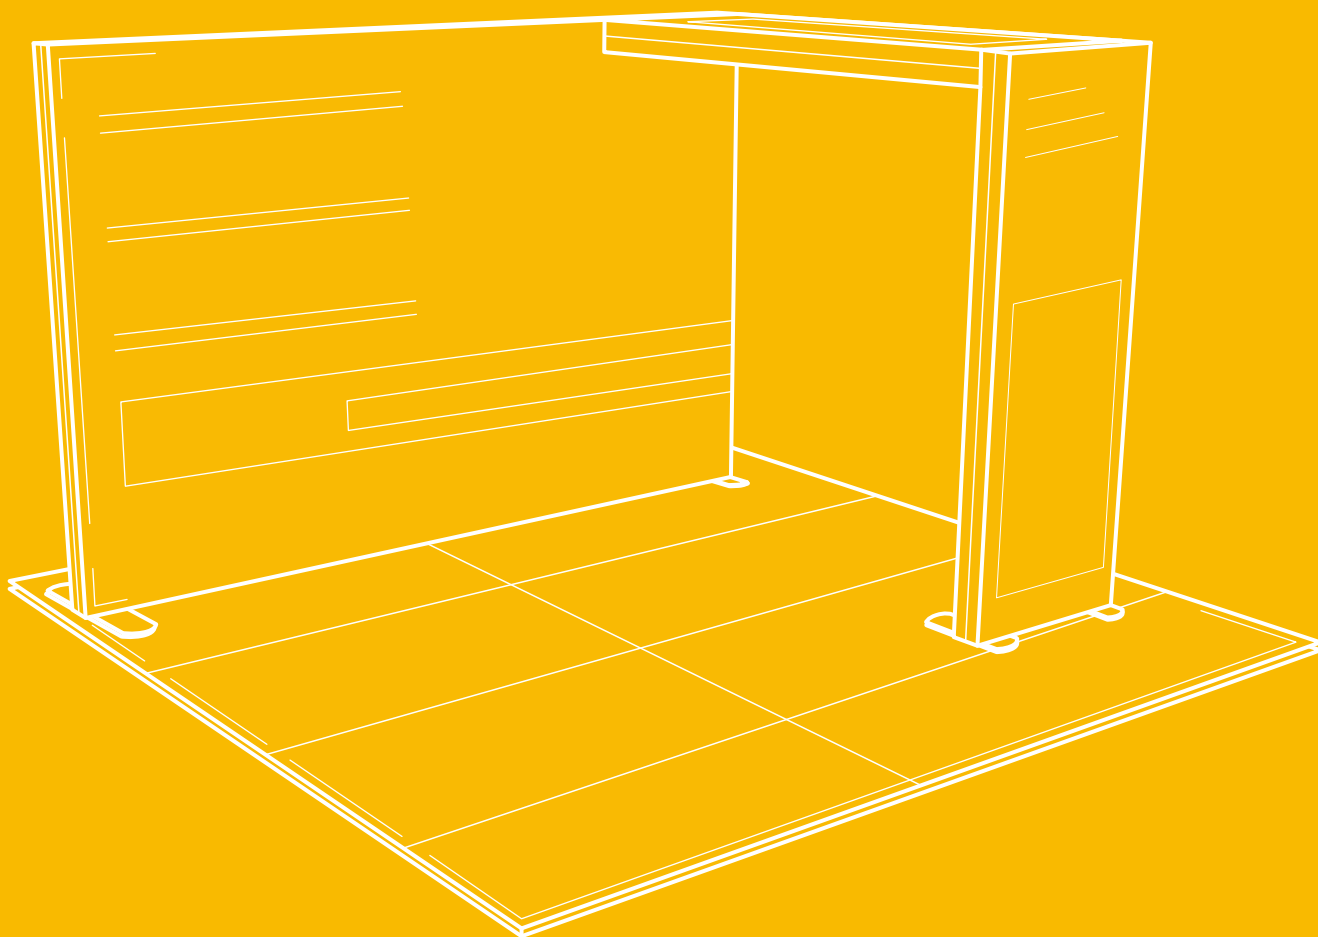

SEG Backlit Archway Connectors

Components.

1 Inserting Piece (x2)

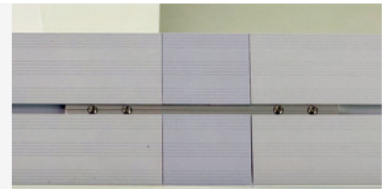

Installation Image

2 Archway Connectors (x4)




Installation Image

SEG Backlit Archway Assembly Instruction

Applies to: 2.8ft x 8.2ft

1.

**Arch installation requires 2-3 people. Do not attempt to install it alone.*
Before assembling or installing your archway, ensure that your **Back Wall (A)**, **Vertical Archway Panel (B)**, and all other booth components are fully assembled.

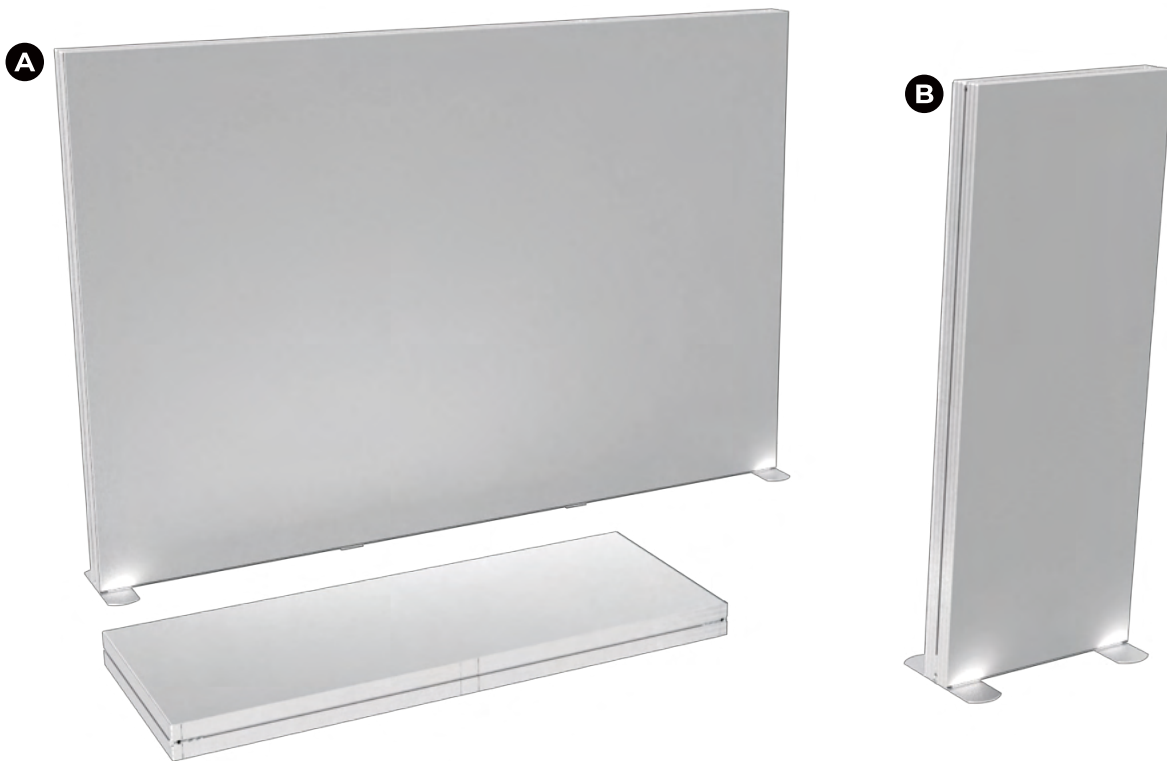

2.

Identify the top panel of your archway. This panel will not require the feet included in your kit. Instead, use the two L-shaped base pieces that came with your custom prints. Once assembled, you should have a perfect rectangular panel without any feet.




SEG Backlit Archway Assembly Instruction

Applies to: 2.8ft x 8.2ft


3.

Find the two **Inserting Pieces (1)** and slide one bar into each side of the arch top panel. Continue sliding until both bars are centered on the panel, then tighten the screws on each bar to securely fasten them in place. This adds strength to the panel.

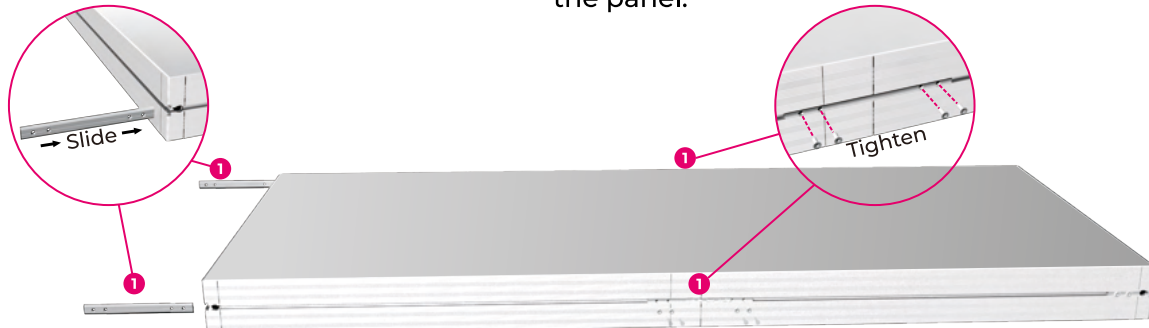


4.

Locate the 4 **Archway Connectors (2)** and remove the silver blocks from each side using the supplied hex key.

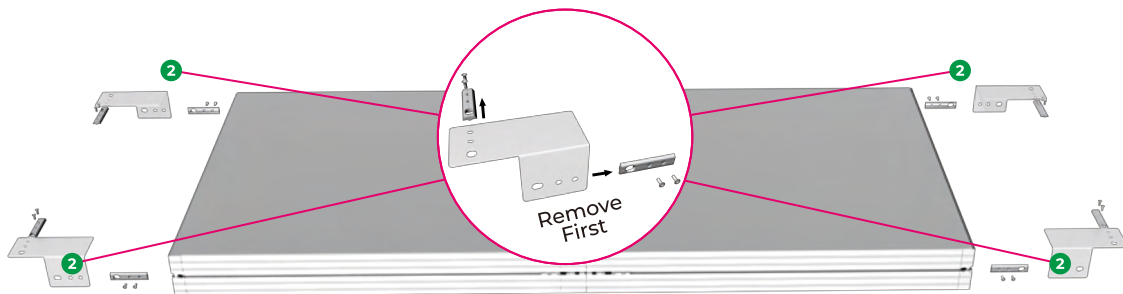

5.


Slide the silver blocks into all 4 corners of the archway top.

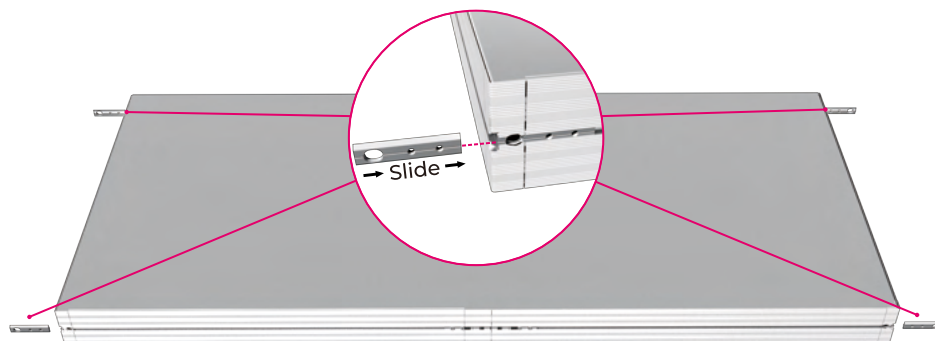


SEG Backlit Archway Assembly Instruction

Applies to: 2.8ft x 8.2ft

- 6.** Place the **Archway Connectors (2)** onto each of the corners. Insert screws through the corner brackets and into the silver blocks, then tighten to secure.

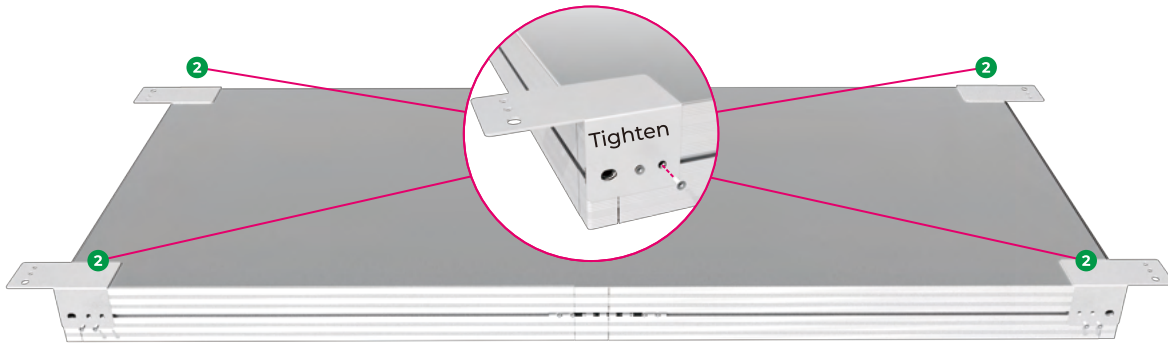

- 7.** Locate your **Vertical Archway Panel (B)** (it should have the feet). Stand it vertically and position it where your archway will stand.

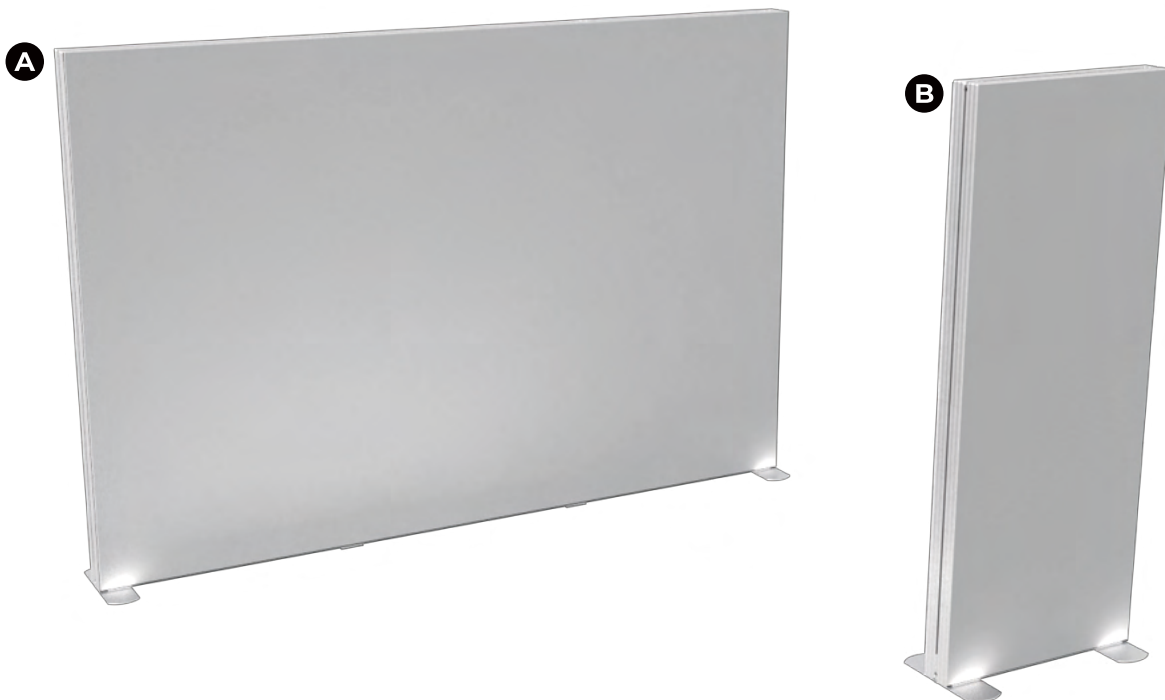


SEG Backlit Archway Assembly Instruction

Applies to: 2.8ft x 8.2ft


8.

Install the silver blocks into the top of the vertical archway panel. Install the remaining silver blocks into the channel on the top of your back wall.

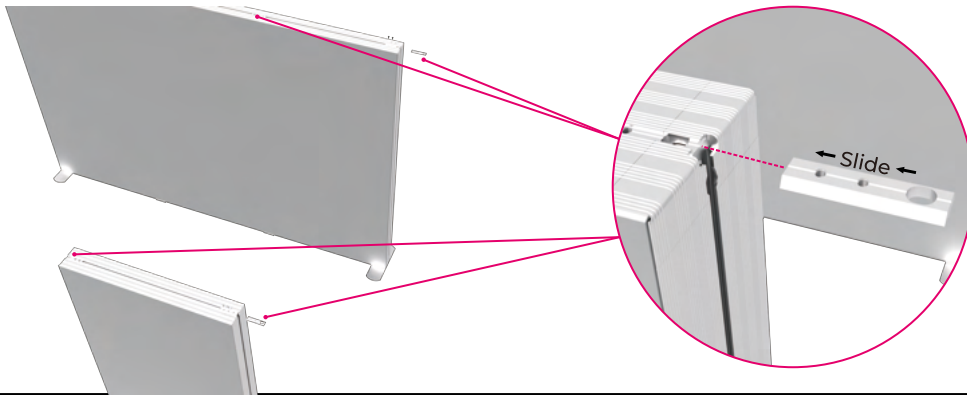

9.

With 2 people or more, carefully lift the top of the archway and place it on top of the back wall and vertical partition.

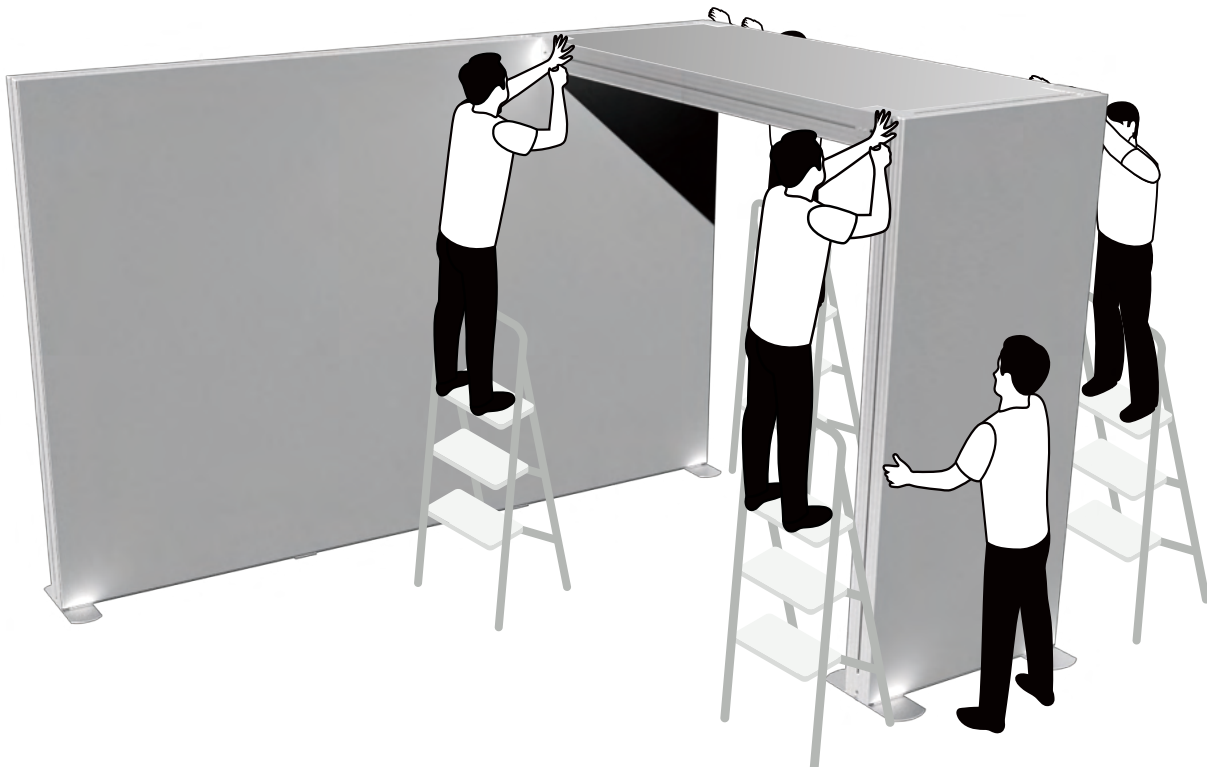


SEG Backlit Archway Assembly Instruction

Applies to: 2.8ft x 8.2ft

10.

Insert the screws through each corner bracket into the silver blocks on your arch wall and back wall. Tighten to secure.

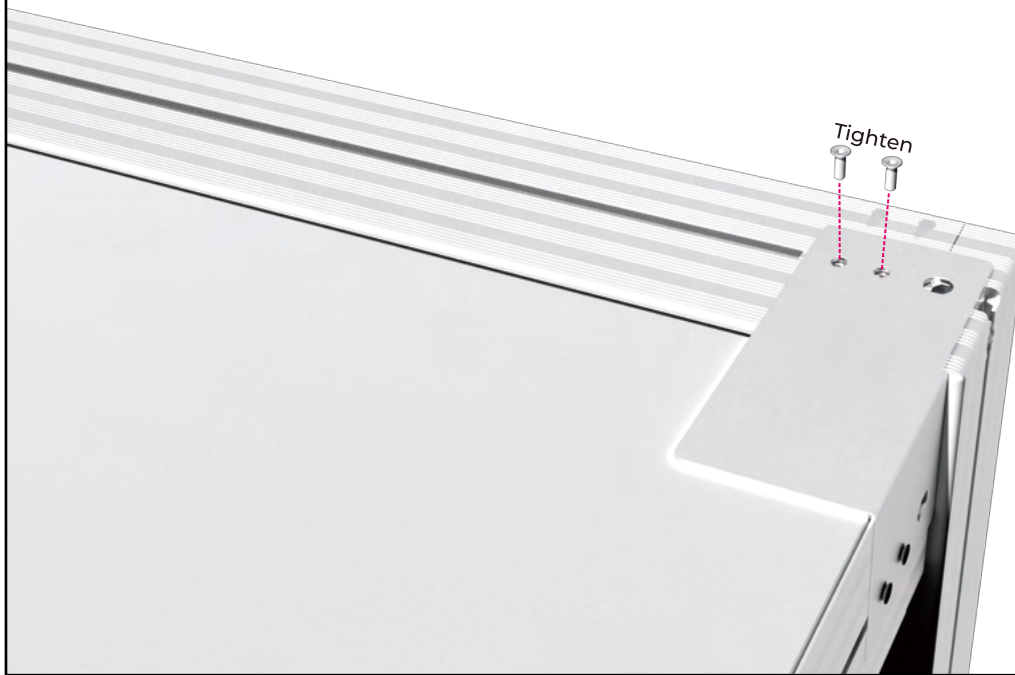

9.

Run your power supply through the access hole on either side of your arch base. You may need to use a tool to punch out the center of the opening.



