SEG BACKLIT PARTITION TRADE SHOW DISPLAY

ASSEMBLY INSTRUCTION

Indoor Display Solution

User Friendly

Cutting-Edge Design

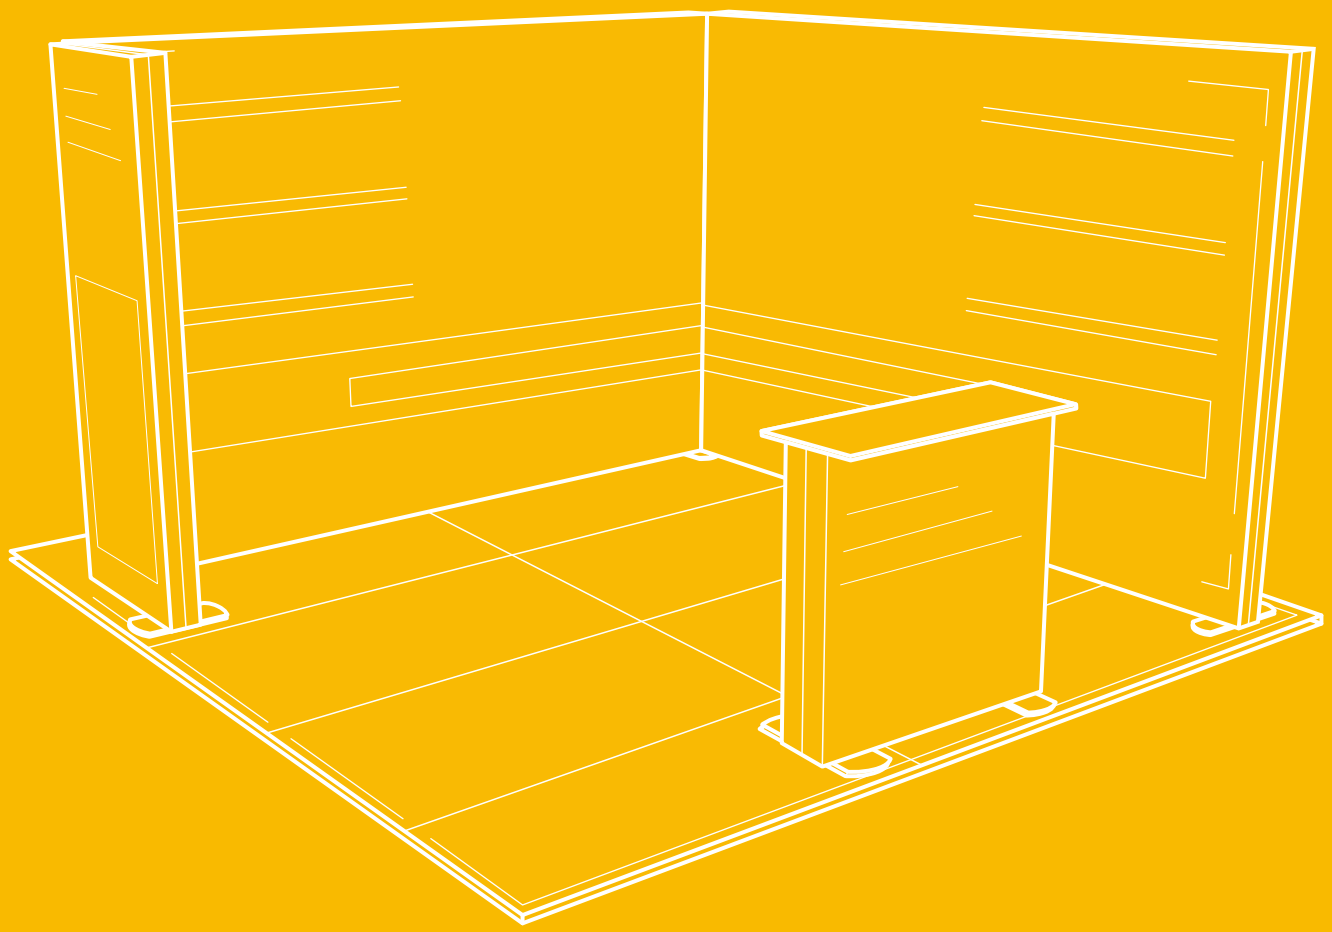

Components.

A **Profile with LED Strip** (Top & Bottom) (x2)



B **Side Profile with Cable** (x2)



C **Side Profile without Cable** (x2)



D **Horizontal Inner Struts** (x1)

F **Base Plate** (x2)



G **Corner Connectors** (x2)



H **Top & Side Connectors** (x2)

I **Power Supplies w/ Device Plugin**

SEG Backlit Partition Assembly Instruction

Applies to: 2.8ft x 8.2ft

1. Begin by laying all of the Profile pieces w/ LED lights **(A)** in 2 rows, sorting them by matching their blue number to the corresponding Top & Side Connectors **(H)**, Bottom Connectors **(G)**, Base Plate **(F)**

**All of these pieces will connect to the a part that has a matching blue number*

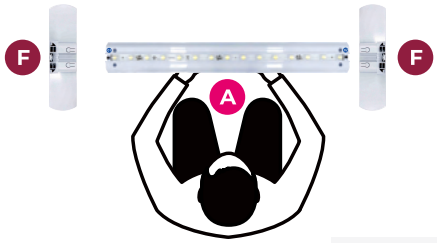

A **Profile with LED Strip** (Top & Bottom) (x2)

F **Base Plate** (x2)

G **Corner Connectors** (x2)

2. Connect all of the parts laid out in step to by pushing them together until the tabs click into place on each of the connectors.

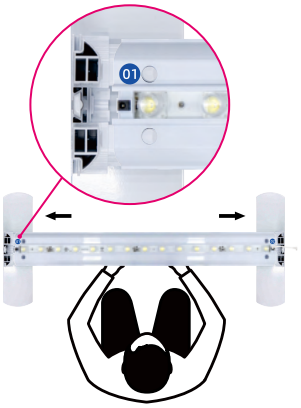

SEG Backlit Partition Assembly Instruction

Applies to: 2.8ft x 8.2ft

3. Lay out the remaining side profiles **(B)**, matching their blue numbers to their corresponding connectors **(H)** (as in step 1 and 2)

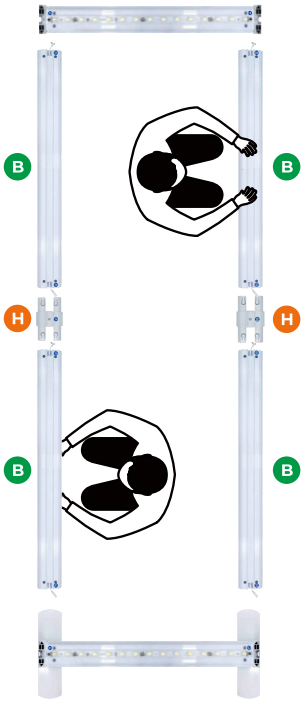

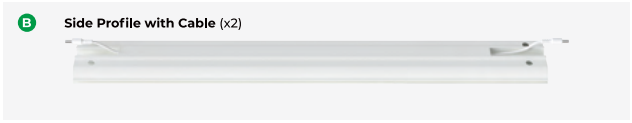

4. Connect all of the parts laid out in step 3 to by pushing them together until the tabs click into place on each of the connectors.

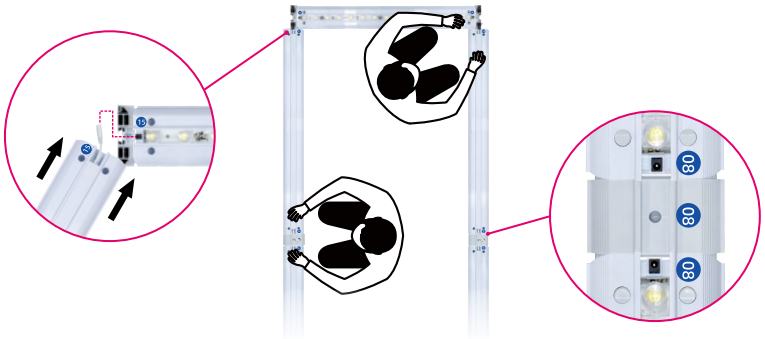

SEG Backlit Partition Assembly Instruction

Applies to: 2.8ft x 8.2ft

5. Locate the Horizontal Inner Struts **(D)**. Starting from one side of the frame, carefully press the Horizontal Inner Struts **(D)** in between the side connector. Then, carefully rotate the Horizontal Inner Struts clockwise until the connection is secure.

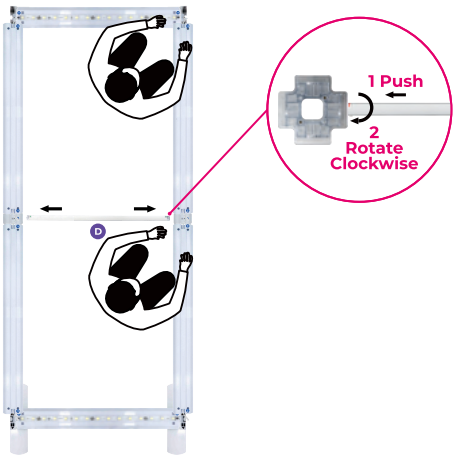

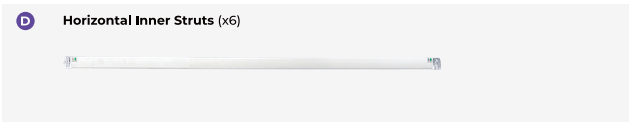

6. Locate your power supplies **(I)** and run 2 power cables into the holes on the bottom of each side.

SEG Backlit Partition Assembly Instruction

Applies to: 2.8ft x 8.2ft

7. Connect one power supply to the two power connections on each side. One will be on the bottom and one will run up the side.

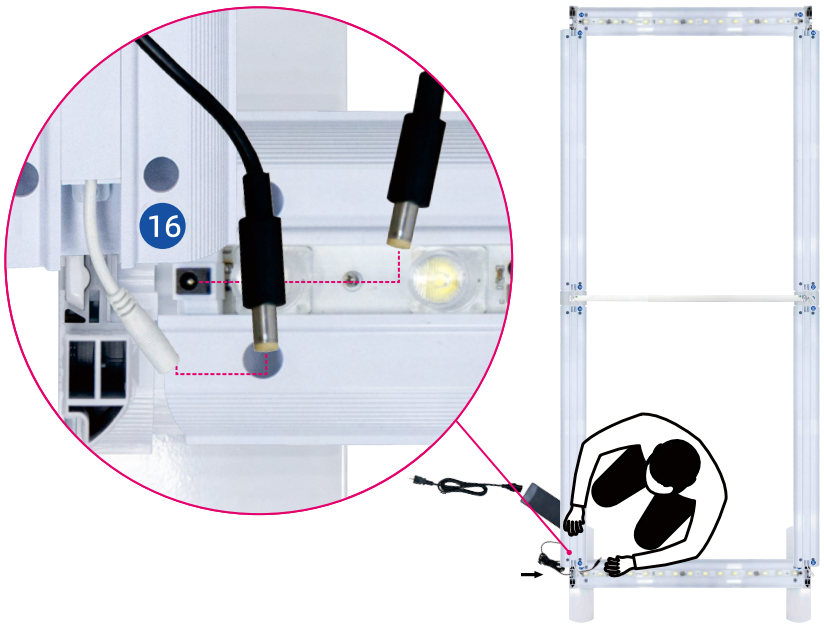

8. Instal graphics by firmly pushing the silicone edge into the channel on the from of the frame. Keep tension on the graphic as you go down each side so there is enough fabric to reach the end. Push the silicone edge of the center of each graphic into the center of the channel, then smooth the the edge into the channel buy sliding a thumb towards the corner.

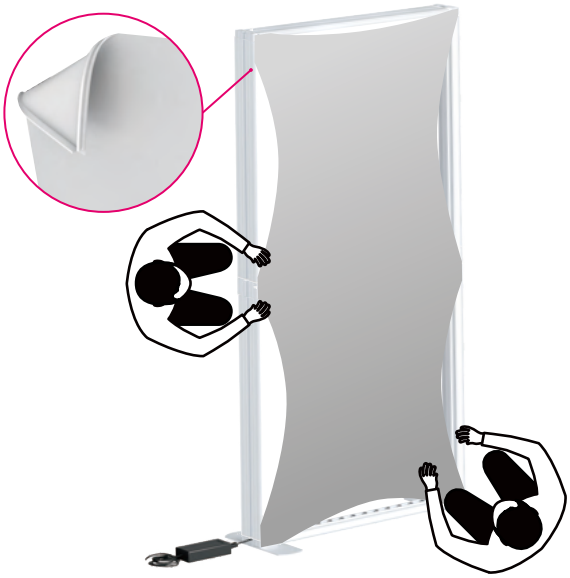

SEG Backlit Partition Assembly Instruction

Applies to: 2.8ft x 8.2ft

9.

With a partner, pick it up off the ground from each side and carefully lift it onto its feet..

**Do not pick up from the middle!*

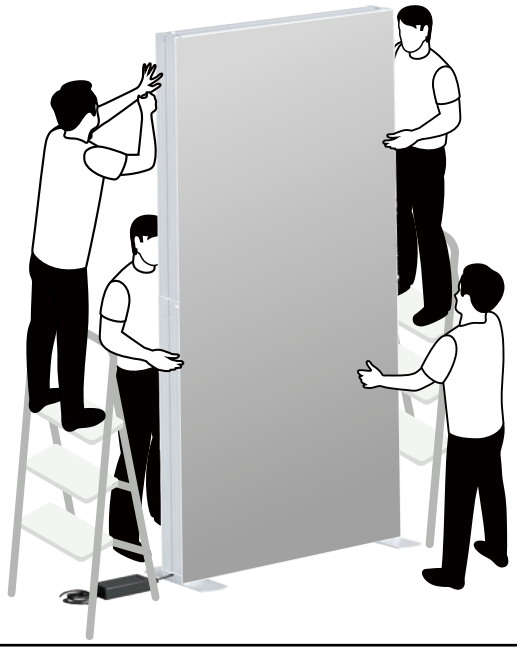

10.
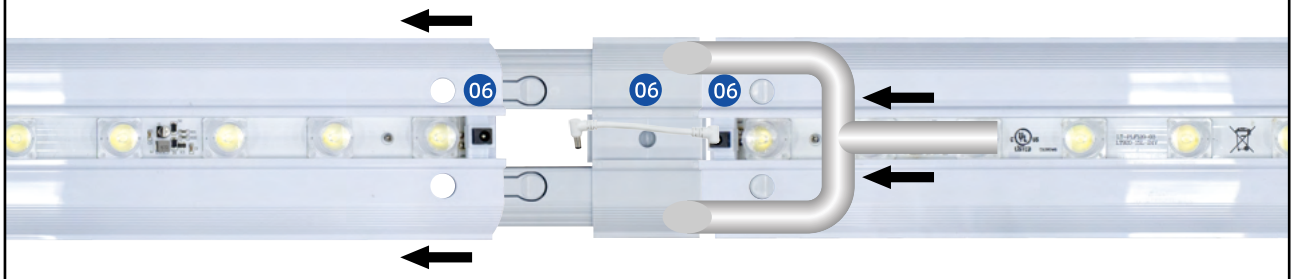
To disassemble, Use the white U-Shaped tool included with your hardware to depress small circles from the lower portion of each side of the display.